

Compact Vibrating Rod for Dry Solid Materials



Designed for Tight Spaces

The CVR-600 compact vibrating rod is an economical, single rod, compact point level control that has been designed for use in small bins and hoppers. The small yet rugged design allows the CVR-600 to be used in pellets, grain or other dry granular solid applications where other level sensors simply won't fit.

Simple, Dependable Operation

The signal from the electronic circuit of the CVR-600 excites the single rod of the instrument to vibrate on its resonance frequency of approximately 460 Hz. When material covers the rod of the probe, the vibration stops. This is sensed by the electronic circuitry which forces its output relay to switch. When the blade becomes uncovered, the vibration will restart and the relay will switch back.

Single Rod Design Not Affected by Material Characteristics

The CVR-600 vibrating rod principle overcomes difficulties associated with changes in dielectric constant, humidity, temperature, and material density. The single rod design eliminates the problem of false signaling due to material wedging and buildup associated with "tuning fork" type probes. The CVR-600 is designed for reliable point level sensing in small bins and hoppers that contain plastics, food, seed, chemicals, and other pellets or dry granular solid materials.



Ideal for small bins, hoppers, and feeders

- Single rod design prevents false signals
- No calibration required
- Wear and maintenance-free
- High and low level fail-safe
- Three sensitivity adjustments
- Universal power supply
- Self-cleaning sensor
- 1" NPT mounting
- Remote electronics available
- Process temperatures up to 300°F




Compact Vibrating Rod


BINMASTER

www.binmaster.com


Compact Vibrating Rod for Small Bins and Hoppers

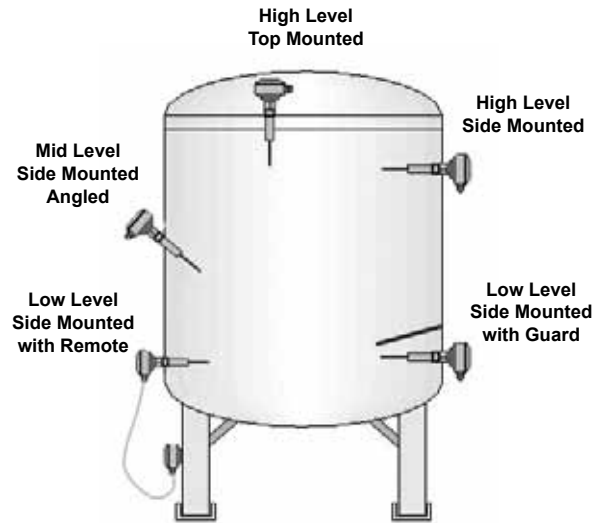

CVR-600 PC Board Layout

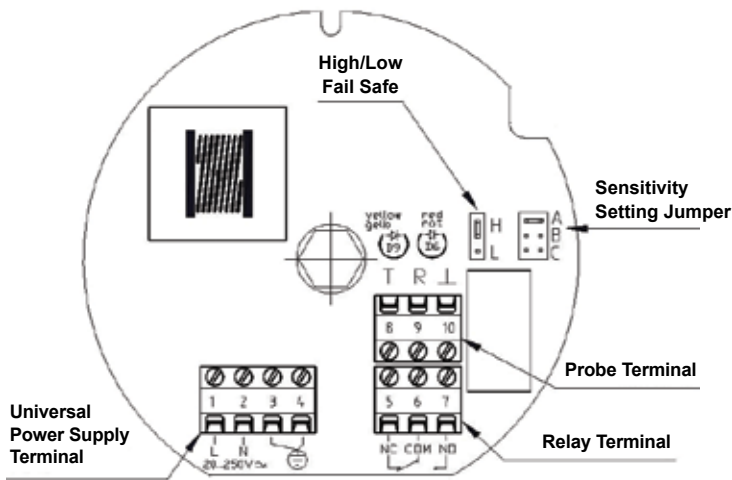

CVR-600 Dimensions

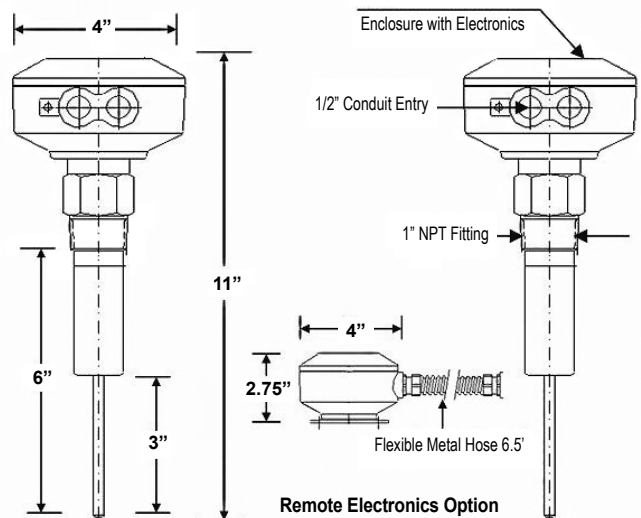

Technical Specifications

Input Voltage	Wide range 20...250V AC/DC
Power Consumption	3 VA
Relay	SPDT 5A 250 VAC
Time Delay	1 second from stop of vibration 2 to 5 seconds for start of vibration
Temperature Range	Ambient for electronics: -4°F to +140°F Process temperature standard: -4°F to +175°F Process temp high temperature: -4°F to +300°F
Minimum Material Density	3.5 lb./ft. ³
Maximum Pressure	145 psi
Wiring Cable	1/2"
Mounting	1" NPT
Enclosure	Diecast aluminum NEMA4
Probe	AISI 302 stainless steel

CVR-0312-NPC ISO 9001:2008 Certified

BINMASTER

Shipping Address:
7201 N. 98th St.
Lincoln, NE 68507

Mailing Address:
P.O. Box 29709
Lincoln, NE 68529

800.278.4241 | 402.434.9102
Fax: 402.434.9133
www.binmaster.com
info@binmaster.com

© 2012 BinMaster.® All Rights Reserved.