




Enbio^S + Enbio PRO
World's fastest autoclaves.
Class B.


Another dimension. Same performance.

Enbio sterilizers are up to 6 times smaller and 3 times lighter than a typical class-B / vacuum autoclave. But when it comes to work efficiency, they keep up the pace.



	Typical autoclave	Enbio PRO	Enbio ^S
 Tool pouches / h	50	50	32
Vacuum / drying	✓	✓	✓

The new definition of sterilization speed.



Time is a relative value. It flows differently under different circumstances. But when you need to have your tools ready, you need them, well, FAST. While other autoclaves might test your patience, Enbio bends the laws of physics to cut the waiting to the invisible.



Enbio Magic Filter: forget about water



Imagine a race car covering a long distance on a teaspoon of fuel. Enbio autoclaves are like that. With Enbio Magic Filter as a standard equipment, they can run up to 1000 processes on just 1 liter of demineralized water. No tap or sink required.

**1 liter
of demineralized
water**





1000 processes*




* - Enbio PRO - 700 processes

Enbio^S. Speedmaster.

Enbio S is compact to fit even a cramped space. Unbelievably short process times will save your procedure in emergency, or allow sterilization of the instruments as you go, between patients.



<p>Unwrapped FAST / 134°C</p> <p>7 min</p>	<p>Wrapped Class B / 134°C</p> <p>15 min</p>	<p>Wrapped Class B / 121°C</p> <p>30 min</p>
---	---	---

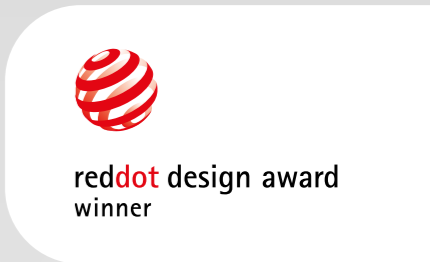

Unit weight
15 kg

Capacity
Max. packages amount (circa) **8**
Max. recommended batch weight **0,5 kg**
Process chamber volume **2,7 l**

Pressure & temperature
Working pressure **2,1 Bar**
Max. pressure **2,3 Bar**
Max. process temperature **137°C**

Dimensions
Width **25 cm**
Height **16 cm**
Depth **56 cm**


Electrical
Power supply **230V/50Hz**
Installed power **2250 W**
Max. power consumption **15 A**

Misc
Ingress protection level **IP20**
Data archiving **USB stick**
Water conductivity* **< 15 µS/cm**

* - demineralized water only

Enbio PRO. Small foot. Big space.

Enbio PRO is an ideal solution as a basic workhorse in a small practice. Superfast sterilization and room to hold most of the instruments, including popular implant cassettes.



Class B
Vacuum
Pouches+
drying



Medical Certified
Medical device class II b
EN-13060 / 98/42/EEC Directive
FDA Approved

Unwrapped FAST / 134°C	Wrapped Class B / 134°C	Wrapped Class B / 121°C	Wrapped / PRION Class B / 134°C
9 min	18 min	30 min	43 min



Unit weight

20 kg

Capacity

Max. packages amount (circa) **16**
Max. recommended batch weight **1,0 kg**
Process chamber volume **5,3 l**

Pressure & temperature

Working pressure **2,1 Bar**
Max. pressure **2,3 Bar**
Max. process temperature **137°C**

Dimensions

Width **25 cm**
Height **20 cm**
Depth **56 cm**

Electrical

Power supply **230V/50Hz**
Installed power **2250 W**
Max. power consumption **15 A**

Misc


Ingress protection **IP20**
Data archiving **USB stick**
Water conductivity* **< 15 µS/cm**

* - demineralized water only


Implantology



Enbio PRO accommodates all popular implant cassettes that fit in the 28×18×7 cm space.

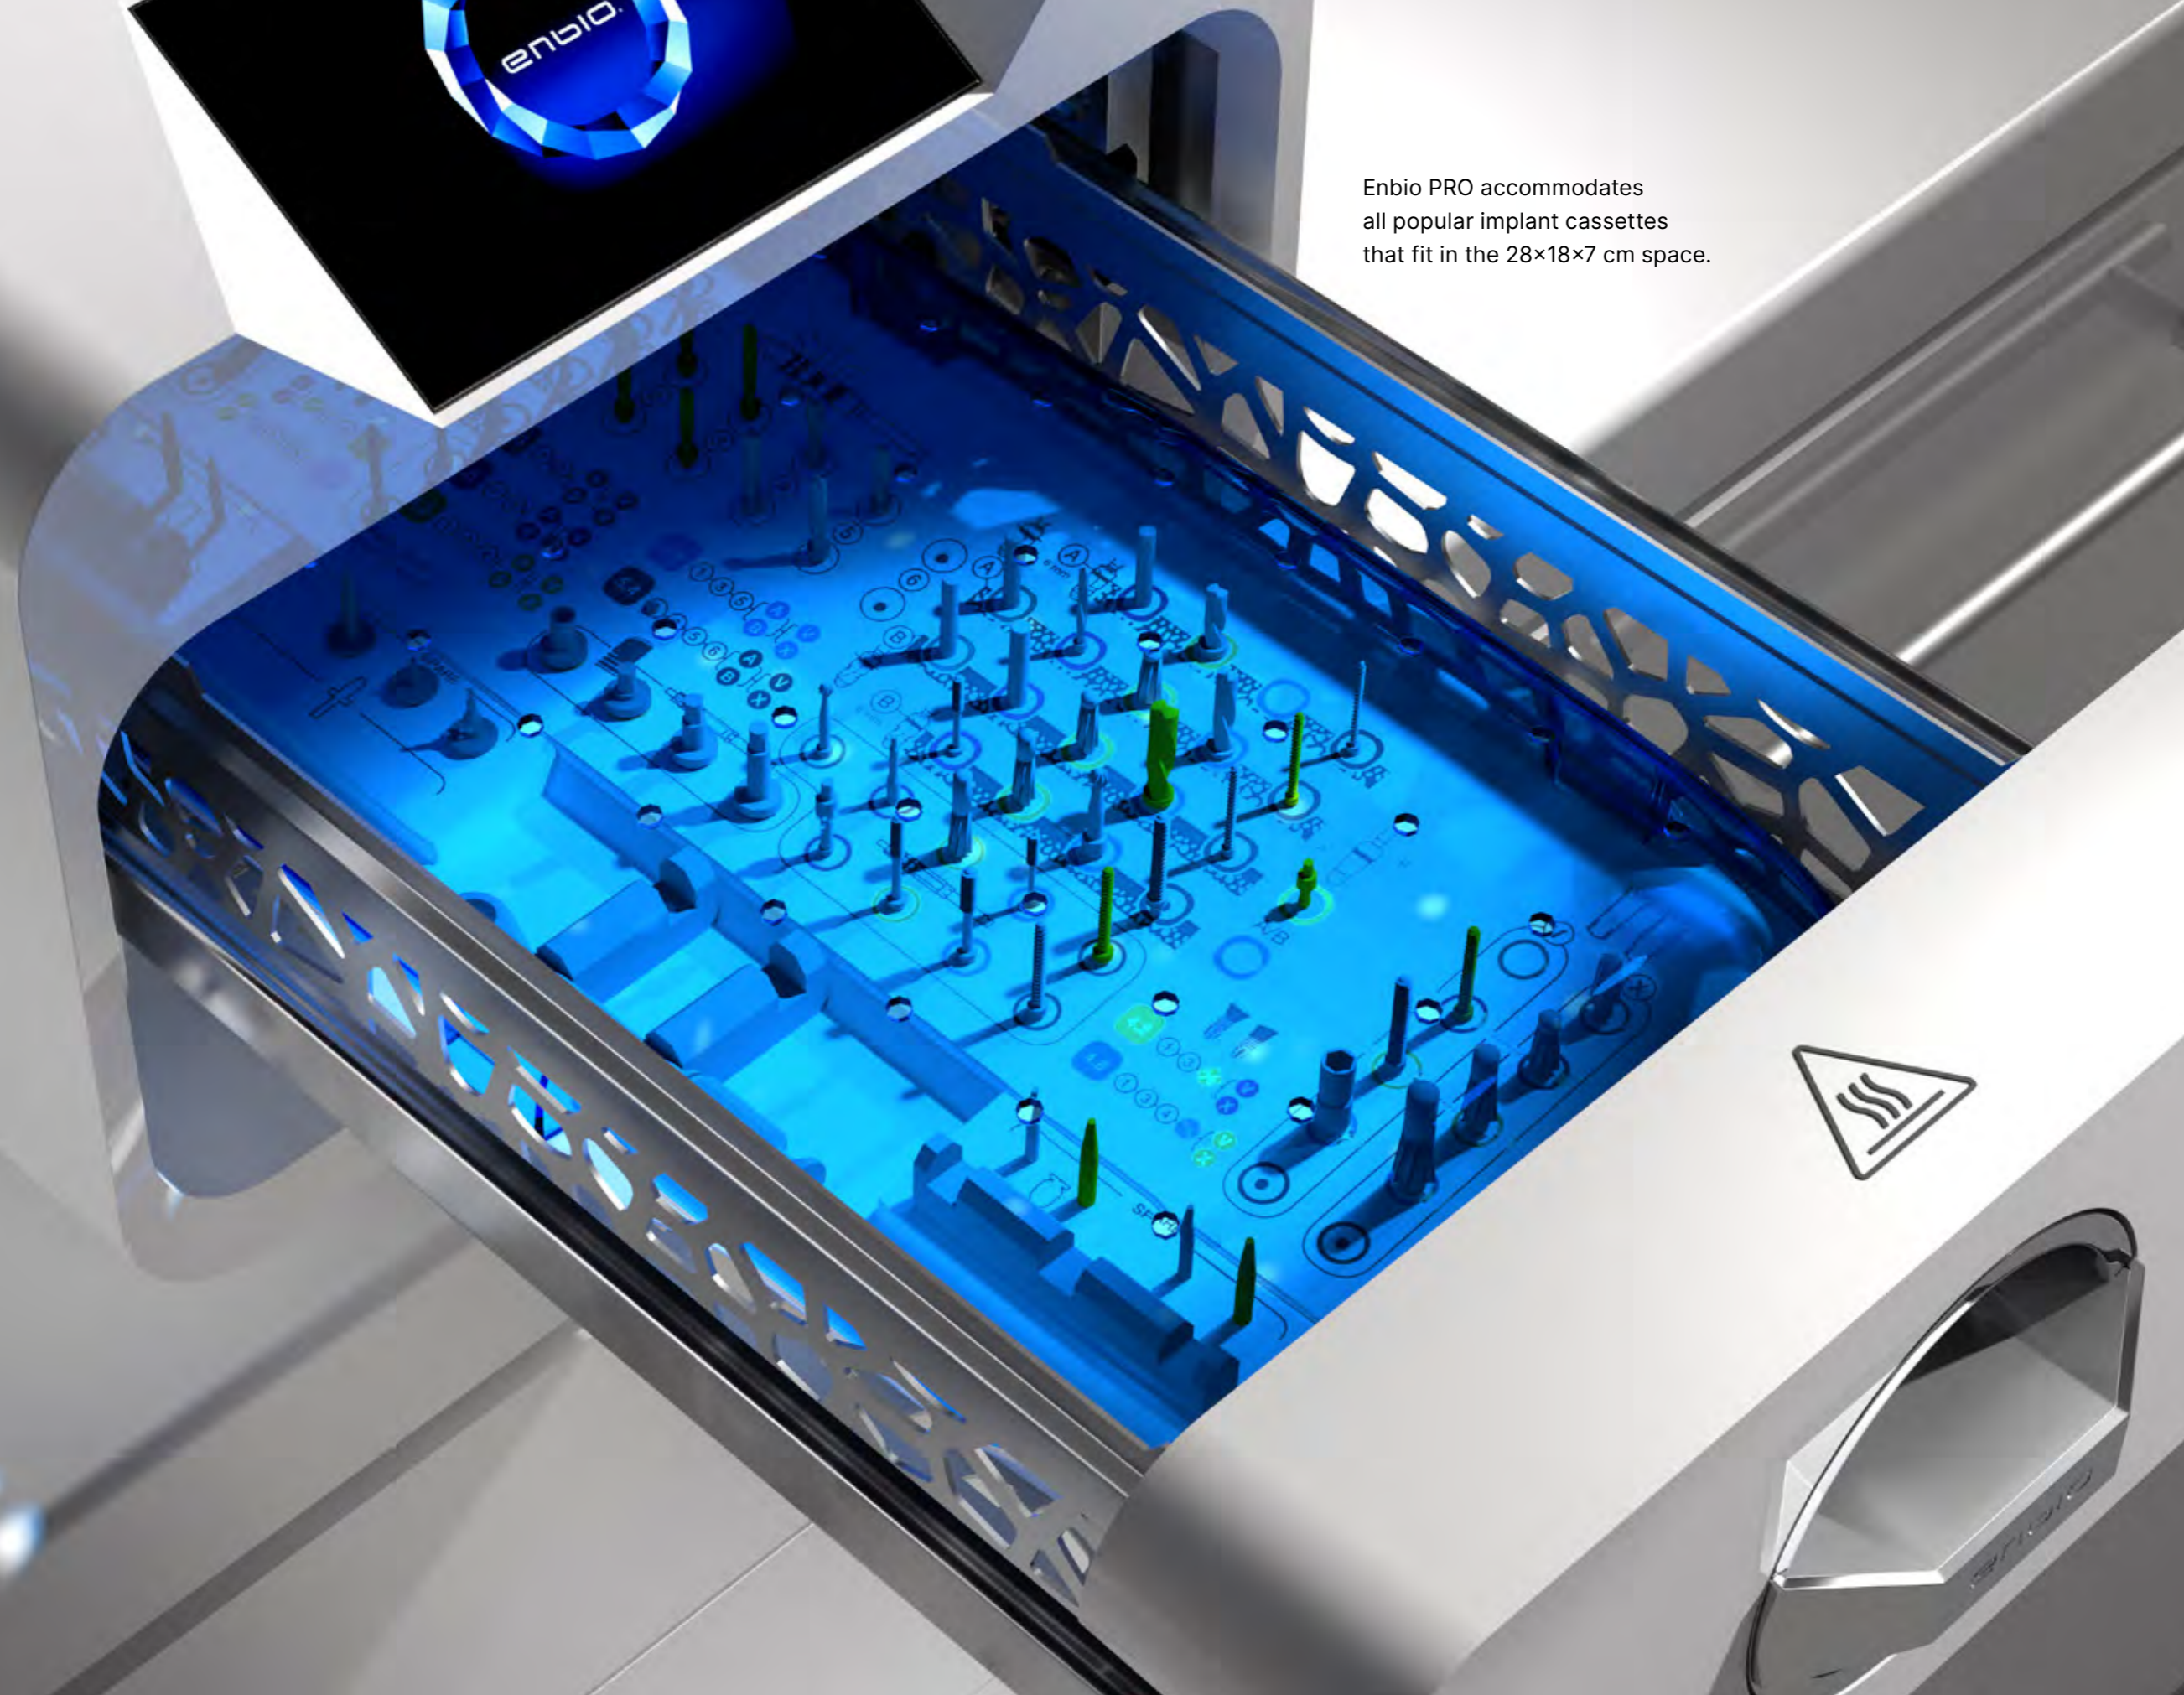

Enbio user manual.

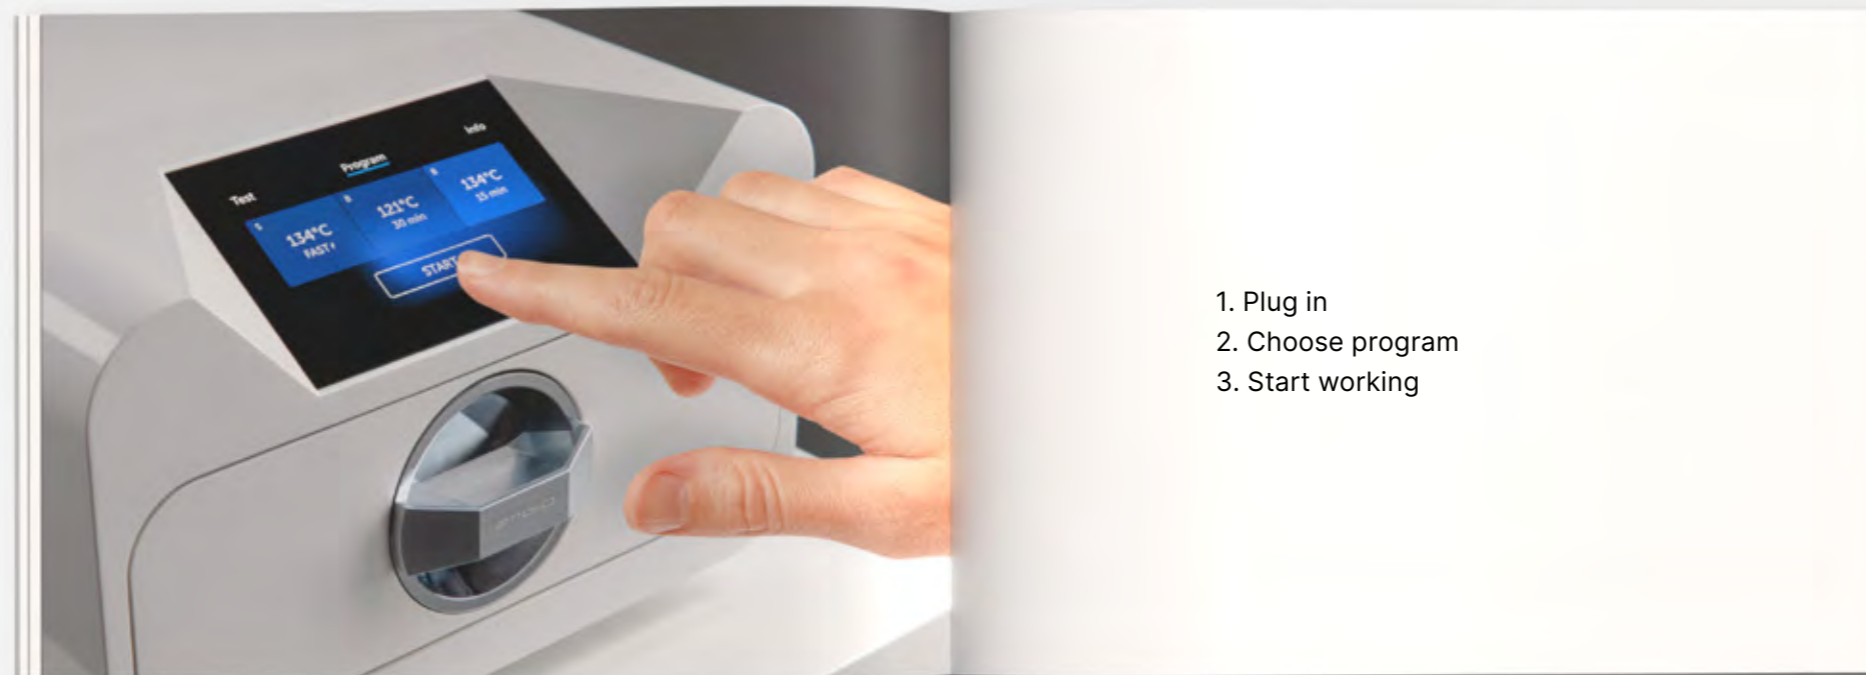

1. Plug in
2. Choose program
3. Start working

Over 20 000 autoclaves sold in 5 years.

In just 5 years, Enbio's worldwide community has grown to over 20,000 users, who sterilize instruments in our autoclaves, for the complete safety of their customers and patients.





Designed
in Switzerland

Worldwide presence.

Enbio autoclaves are manufactured in the EU and distributed globally through logistics centers covering Europe, North America and the Middle East.



Dentistry



Veterinary



Podiatry



Surgery



Tattoo



Beauty

enbio.com



Enbio Group AG
Eichengasse 3, 4702 Oensingen
Switzerland



Distributor in Australia
Pacific Sensor Technologies Pty Ltd
Unit 4, 3 Neutron Place Rowville, VIC 3178 Australia
1300 662 720 | sales@pacificsensortech.com.au
www.pacificsensortech.com.au